

THREADED TYPE FOOT CHECK VALVE

CC 1142A

APPLICATION

Area of use: water distribution, HVAC, pumping.




Fluids: hot water, cold water, potable water.

GENERAL CHARACTERISTICS

- Range : DN 1/2" to DN 2".
- Female / Female threaded BSP connection according to ISO 228-1.
- The flow direction is indicated by an arrow on the body
- Perfect centering of the seat thanks to the guidance.
- Mounting all positions with stainless steel spring.



CONSTRUCTION

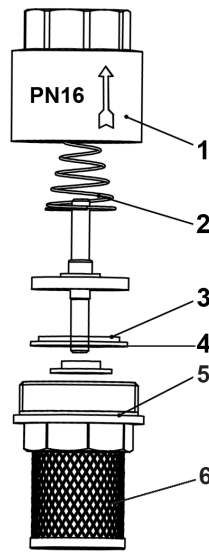

Pos.	Quantity	Description	Material
1	1	Body	Brass CW617N
2	1	Spring	Stainless steel
3	1	Disc	PA + ABS
4	1	Gasket	NBR
5	1	Bonnet	Brass CW617N
6	1	Strainer	Stainless steel

PRODUCT APPROVALS




Tecofi France

83 rue Marcel Mérieux - 69960 Corbas
Tél. +33 (0)4 72 79 05 79 - Fax. +33 (0)4 78 90 19 19
E-mail : sales@tecofi.fr - www.tecofi.fr



DIMENSIONS

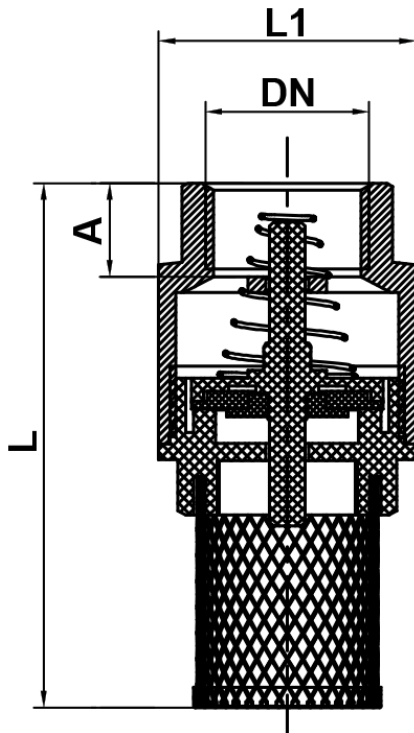

DN		A	L	L1	Weight (kg)
inch	mm				
1/2"	15	12	67.3	33	0.08
3/4"	20	12	78.5	39.5	0.11
1"	25	15	90	45.2	0.14
1 1/4"	32	15	102	58.7	0.22
1 1/2"	40	16	117.5	68	0.36
2"	50	17	134.5	84	0.52

WORKING CONDITIONS

Maximum working pressure : 16 bar
 Maximum working temperature : -20°C / + 100°C

Tecofi France

83 rue Marcel Mérieux - 69960 Corbas
 Tél. +33 (0)4 72 79 05 79 - Fax. +33 (0)4 78 90 19 19
 E-mail : sales@tecofi.fr - www.tecofi.fr

