

Ref. : CR 3201 pas

Rev. : Initial

Date : 22/10/2013

Page : 1/1

# STRAINER

## CR 3201



**Tecofi'**  
VALVE DESIGNER - FRANCE

### APPLICATION

General use : for all common fluids.

### GENERAL CHARACTERISTICS

From DN3/8" to DN 4".  
Stainless steel threaded male BSP.  
Stainless steel mesh.


### CONSTRUCTION

2	Mesh	Stainless steel 316
1	Threaded	Stainless steel 316
Pos.	Description	Material



### DIMENSIONS

DN		H	ØA	Mesh	Weight (kg)
mm	inch				
10	3/8"	51	21	1,2	0,011
15	1/2"	55	23	1,2	0,015
20	3/4"	62	29	1,2	0,025
25	1"	69	37	1,2	0,037
32	1"1/4	80	44	1,2	0,055
40	1"1/2	89	49	1,2	0,067
50	2"	101	61	1,2	0,084
65	2"1/2	114	80	1,5	0,135
80	3"	126	96	1,5	0,169
100	4"	144	116	2,0	0,243

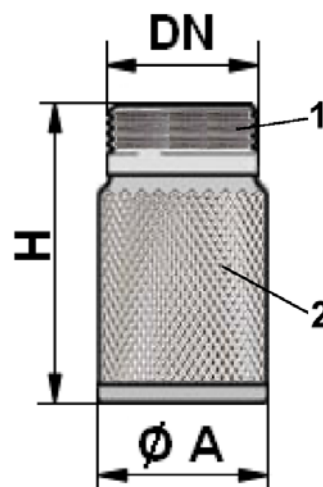

### WORKING CONDITIONS

Maximum working temperature : -20°C / +150°C

### STANDARDS

Fabrication according to ISO 9001 :2000  
Threaded male BSP cylindrical end according to ISO 228-1.