

Ref. : CS 5261S1.pas

Rev. : Initial

Date : 27/02/2018

Page : 1/1

FLANGED TYPE LIFT CHECK VALVE

CS 5261S1



APPLICATION

General use : hot and cold water plants, steam plants, industrial technologies, neutral fluids, heat and refrigerating engineering.

GENERAL CHARACTERISTICS

Range : from DN 15 to DN 150
Extremely reliable.
Wide range of applications.
Simple and sturdy construction.
Reliable and efficient functioning.
Mounting in all positions.




CONSTRUCTION

6	Bolts, Nuts	Steel	
5	Spring	Steel	X10CrNi18-8
4	Gasket	Graphite	
3	Disc	Stainless steel 304	
2	Bonnet	Steel	GP240GH
1	Body	Steel	GP240GH
Pos.	Description	Material	

DIMENSIONS

DN	15	20	25	32	40	50	65	80	100	125	150
L	130	150	160	180	200	230	290	310	350	400	480
H	55	55	65	75	80	85	95	115	140	160	200
D	95	105	115	140	150	165	185	200	235	270	300
ØK	65	75	85	100	110	125	145	160	190	220	250
n	4	4	4	4	4	4	8	8	8	8	8
Ød	14	14	14	18	18	18	18	18	22	26	26
Weight (kg)	3,5	4,0	4,5	5,5	9,0	11	15	24	32	48	65

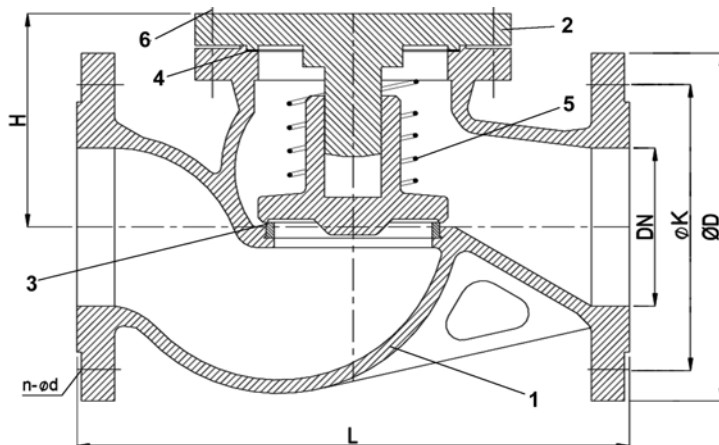

WORKING CONDITIONS

Temperature from - 10°C to 120°C
(Maximum working pressure: 40 bar)

Temperature from +120°C à 180°C
(Maximum working pressure : 33 bar)

STANDARDS

Face to face according to NF EN 558-1 serie 1, DIN 3202 F1.
Flange connection ISO PN40 EN 1092-1.