

Ref. : CSA5743SW

Rev. : Initial

Date : 20/01/2015

Page : 1/1

FORGED STEEL CHECK VALVE 800LBS

CSA5743SW



Tecofi
VALVE DESIGNER - FRANCE

APPLICATION


General use: Petroleum industry, steam, high pressure.

GENERAL CHARACTERISTICS

Standard port.
Horizontal position only (respect the flow direction indicated by the arrow).
Easy maintenance thanks to the bolted bonnet.
Forged carbon steel.
½ stellite (Trim 8).
800 lbs.

CONSTRUCTION

9	Spring	Stainless steel 302
8	Nameplate	Aluminium
7	Rivet	Carbon steel
6	Bolt	Steel ASTM A193 B7
5	Gasket	Stainless steel 316 + graphite spirale
4	Seat	Stainless steel ASTM A276 TYPE 410+STELLITE GR.6'
3	Piston	Stainless steel ASTM A276 type 410
2	Bonnet	Steel ASTM A105 N
1	Body	Steel ASTM A105 N
Pos.	Description	Material

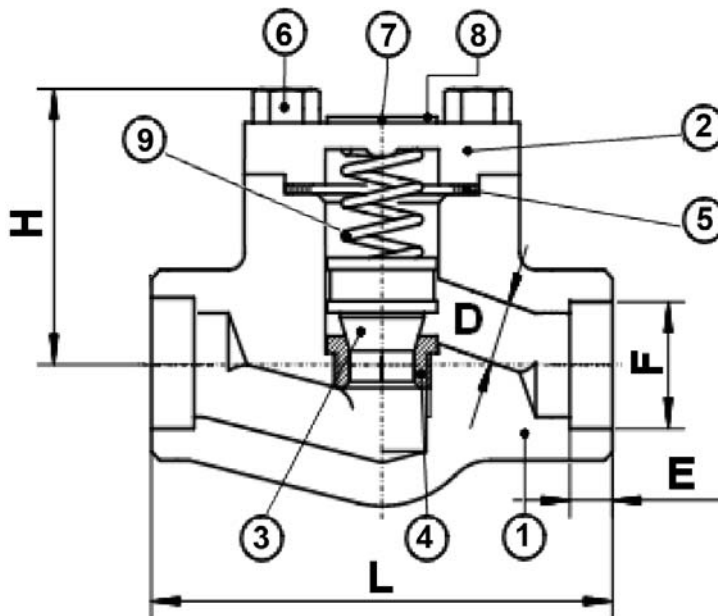

DIMENSIONS

DN		L	H	ØD	E	ØF	Weight (kg)
mm	inch						
10	3/8"	80	53	7	11.1	17.6	1.3
15	1/2"	80	53	9	12.7	21.72	1.2
20	3/4"	90	60	13	14.5	27.05	1.4
25	1"	110	73	17.5	16	33.78	2.4
32	1"1/4	127	80	22.5	17.5	42.54	3.6
40	1"1/2	155	98	29.5	19	48.64	5.4
50	2"	170	118	35	22	61.11	8

WORKING CONDITIONS

Maximum pressure : 138 bar.
Maximum temperature : -29°C/+425°C.


STANDARDS

Fabrication according to **ISO 9001 : 2008**
DIRECTIVE 2014/68/UE
Risk category III module H
Designing according to **ISO 15761** and **API 602 8th**
Approval certificate **API 6D**
Tests according to **API 598, table 6**
Approval certificate Russian Federation **GOST-R**
Check valves approved by the main oil industries
ATEX Group II Category 2 G/2D Zone 1 & 21 Zone 2 & 22
Socket welding (SW) connection.

FLOW COEFFICIENT Kvs (m3/h)

DN	mm	10	15	20	25	32	40	50
	inch	3/8"	1/2"	3/4"	1"	1"1/4	1"1/2	2"
Kvs (m3/h)		0.95	0.86	2.4	5.2	8.2	9.5	15.6

PRESSURE / TEMPERATURE GRAPH

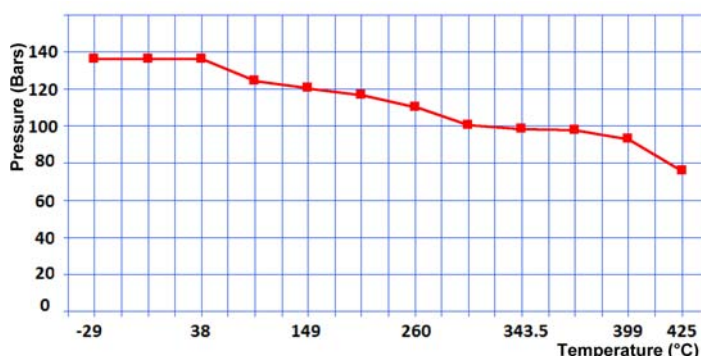

TECOFI France - 83, Rue Marcel Mérieux 69960 Corbas - FRANCE
Tél. +33 (0) 4 72 79 05 79 - Fax +33 (0) 4 78 90 19 19 / +33 (0) 4 72 79 05 70
Adresses e-mail : sales@tecofi.fr ; tecofi@tecofi.fr / Site web : www.tecofi.fr