

«Y» STRAINER

TECHNICAL PASSPORT

THREADED «Y» STRAINER BRASS BODY

F 1142A

APPLICATION

Area of use: water distribution.



Fluid: water


GENERAL CHARACTERISTICS

- Range : DN 1/2" to DN 2".
- Stainless steel removable filter.
- Female / female threaded BSP connection
- The flow direction is indicated by an arrow on the body
- Mounting on horizontal and vertical position with descending fluid.
- Mesh dimensions 8.5/10° mm (850 µ)




ACS

CONSTRUCTION

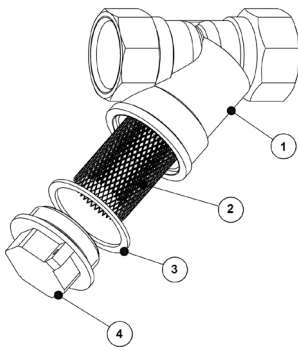

Pos.	Description	Material
1	Body	Brass CW617N
2	Screen	Stainless steel 304
3	Joint	PTFE
4	Bonnet	Brass CW617N

DIMENSIONS

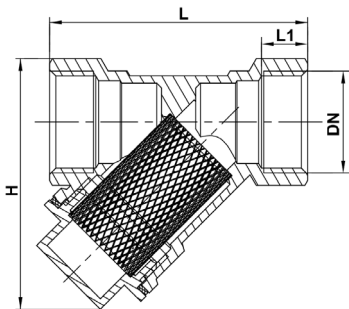

DN		H	L	L1	Weight (kg)
inch	mm				
1/2"	15	53	51.38	9.5	0.11
3/4"	20	62	63.37	10	0.17
1"	25	75	67.76	13.5	0.26
1 1/4"	32	91.5	88.31	14.5	0.52
1 1/2"	40	101	100.16	16	0.68
2"	50	125	120.02	21	1,05

WORKING CONDITIONS

Maximum working pressure : 16 bar

Maximum working temperature: -20°C /+100°C.

PRODUCT APPROVALS



Tecofi France

83 rue Marcel Mérieux - 69960 Corbas
Tél. +33 (0)4 72 79 05 79 - Fax. +33 (0)4 78 90 19 19
E-mail : sales@tecofi.fr - www.tecofi.fr

