

Ref. : F3240TAMISN-IN

Rev. : A

Date : 29/04/2021

Page : 1/1

Screen for flanged type strainer F 3240EP PN16

F3240TAMISN-IN



APPLICATION

For all types of fluids.

GENERAL CHARACTERISTICS




Stainless steel screen.
Rolled, welded construction.

CONSTRUCTION

Stainless steel 304 body

DIMENSIONS

DN		L	Ø D	E	Bore diameter	Weight (kg)
mm	inch					
15	1/2"	15	19	0.5	1.0	0.02
20	3/4"	56	26			0.03
25	1	63	31			0.045
32	1 1/4	70	38			0.075
40	1 1/2	88	43.5		0.1	
50	2"	105	52		0.13	
65	2 1/2	127	67		0.18	
80	3"	140	82		0.25	
100	4"	180	102	0.8	1.3	0.34
125	5"	215	133			0.48
150	6"	247	159		0.63	
200	8"	300	208	1.2	1.6	1.1
250	10"	340	252			1.76
300	12"	381	320			2.5
350	14"	540	352			3.9
400	16"	636	402	5		

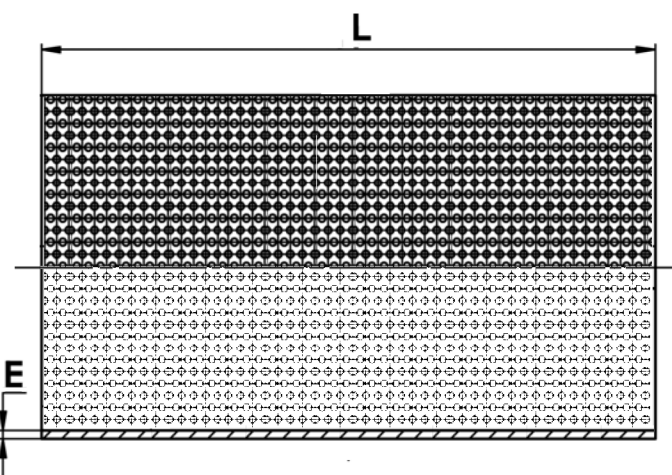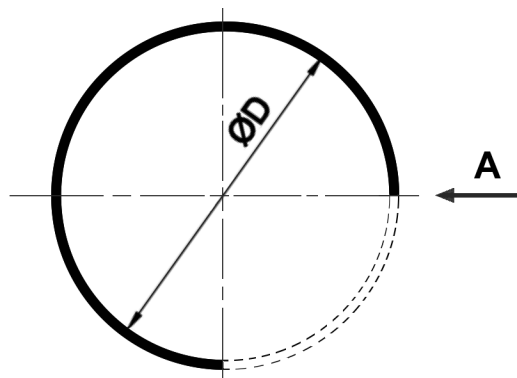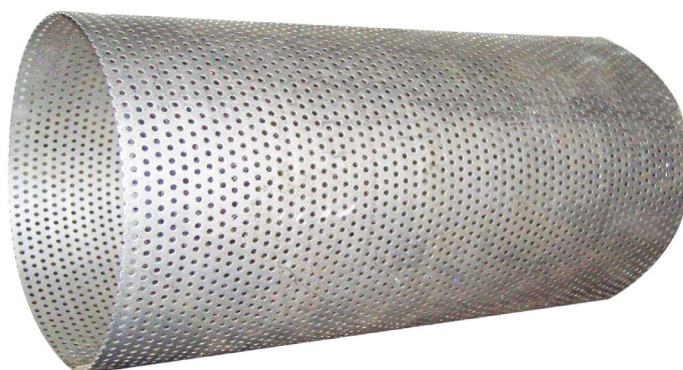

View A

WORKING CONDITIONS

Maximum working pressure: 16 bar

Maximum working temperature: -10°C / +200°C)

Test pressure according to EN 12266-1,
DIN 3230, BS 5154 and ISO 5208

STANDARDS

For use only with flanged type PN16 strainer F3240EP

The photographs and technical art works are not contractual. The specifications of the presented products are open to modifications without previous advice.