

Ref. : JT5250.pas

Rev. : Initial

Date : 19/02/2015

Page : 1/1

DISMANTLING JOINTS PN25

JT5250



Tecofi
VALVE DESIGNER - FRANCE

APPLICATION


General use : for easy installation and dismantling of valves.

GENERAL CHARACTERISTICS

Range : from DN 200 up to DN 1200.
Rigid connection between the connecting pipes.
Long course.
PN25.

CONSTRUCTION

6		Nut	Steel 6.8	
5		Stud bolt	Steel 6.8	
4	1	Sealing ring	EPDM	
3	1	Retaining flange	Carbon steel	S-235 JR
2	1	Flanged pipe - long	Carbon steel	S-235 JR
1	1	Flanged pipe - short	Carbon steel	S-235 JR
Pos.	Qty.	Description	Material	

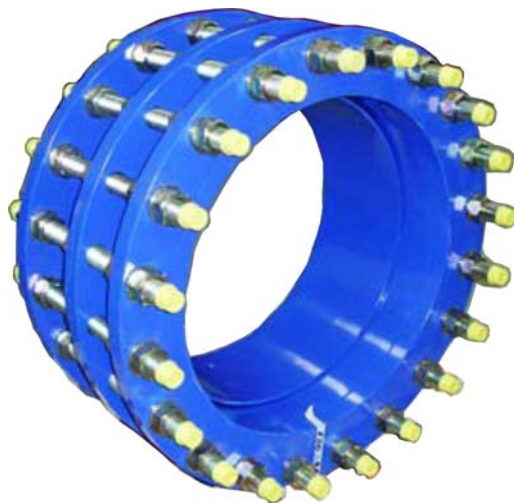

DIMENSIONS

DN		L	L1	Ø D	Ø K	T	C	n x ØL	Weight (kg)
mm	inch								
200	8"	280	450	360	310	40	30	12 x 24	73
250	10"	280	450	426	370	40	32	12 x 27	101
300	12"	280	450	485	430	40	34	16 x 27	132
350	14"	320	530	555	490	40	38	16 x 30	200
400	16"	320	530	620	550	40	40	16 x 33	243
450	18"	350	580	670	600	40	44	20 x 33	295
500	20"	350	580	730	660	40	44	20 x 33	344
600	24"	380	620	845	770	50	46	20 x 36	462
700	28"	400	660	960	875	50	52	24 x 39	627
800	32"	410	700	1085	990	50	56	24 x 45	908
900	36"	420	700	1185	1090	50	58	28 x 45	1220
1000	40"	440	750	1320	1210	50	60	28 x 52	1374
1200	48"	450	750	1530	1420	50	64	32 x 52	1720

