

Ref. : P7101.pas

Rev. : Initial

Date : 09/09/2016

Page : 1/1

# ADJUSTABLE DIFFERENTIAL SWITCH

## P7101



### APPLICATION

General use: control and regulation of non-explosive liquid and gas pressure.

### GENERAL CHARACTERISTICS

Metal housing.  
Chockproof thermoplastic cover.  
Silver alloy contact.  
Rated current: 220 V.  
Possibility (- 250V - 380 V)  
Protection IP 40.


### DIMENSIONS

Scale in bar	Connection	A	B	C	D	Weight (kg)
-0,2... 8	1/4"G	95	58	88	49	0,37
5... 16						0,38
8... 28						0,38

### WORKING CONDITIONS


Maximum pressure: 9 bar for scale (-0.2...8 bar)  
18 bar for scale (5... 16 bar)  
29 bar for scale (8... 28 bar)

Maximum working temperature : 120°C

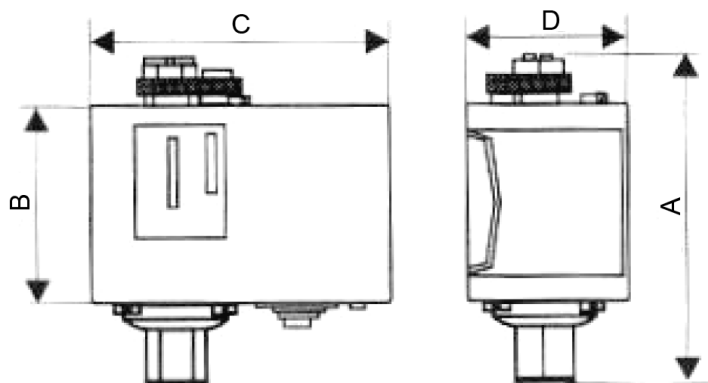

Female threaded connection 1/4G

### Opening/closing contact

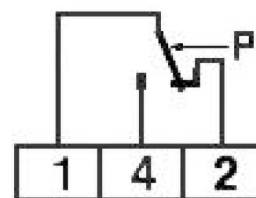

1-2 Closed  
1-4 Opened