

Ref. : RACC8143.pas

Rev. : Initial

Date : 08/09/2016

Page : 1/1

REDUCED MALE THREADED SYMETRICAL COUPLING WITH LOCK

RACC 8143

ISO 9001
BUREAU VERITAS
Certification



EAC

Tecofi'
VALVE DESIGNER - FRANCE



APPLICATION

General use : Irrigation, network fire, hydrocarbon, common fluids.

GENERAL CHARACTERISTICS

Aluminium couplings
Complies to NF-E 29572.

CONSTRUCTION

Aluminium body.

DIMENSIONS


DN		Ø E	Ø C	L1	L2	L3	Weight (kg)
mm	inch						
20	3/4"	20	20	52,7	19,2	12	0,05
25	1"	22	24	56,5	19,7	13	0,07
32	1"1/4	30	30	67	21,5	13	0,11
40	1"1/2	38	40	69,5	27,5	15	0,16
50	2"	48	50	84,5	36	18	0,30
65	2"1/2	63	65	86	34	20	0,34
80	3"	80	82	99	39	24	0,59
100	4"	96	98	108	42	26	0,86
150	6"	149	149	158	59	34	3,19

WORKING CONDITIONS

Maximum working temperature: -10°C / +180°C
Working pressure : 16 bar.

STANDARDS

Fabrication according to ISO 9001 : 2008
Construction according to NF-E 29572
Male threaded connection according to NF EN ISO 228-1.

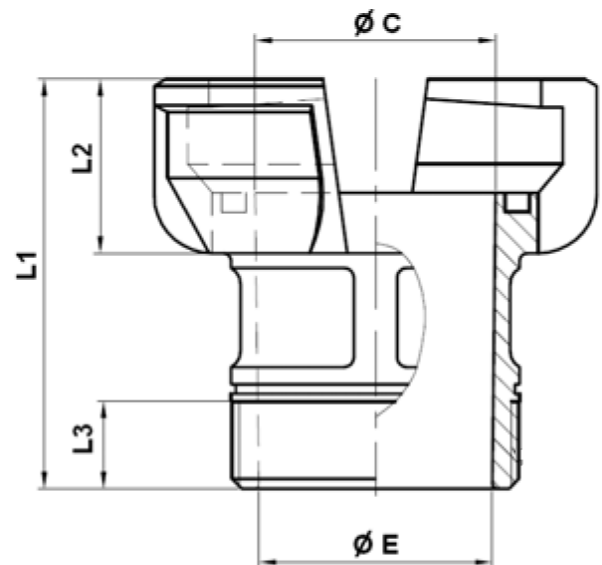

Les photographies et les illustrations techniques ne sont pas contractuelles. Les spécifications des produits présentés sont susceptibles de modifications sans avis préalable