

Ref. : RACC8141.pas

Rev. : Initial

Date : 07/09/2016

Page : 1/1

# REDUCED FEMALE THREADED SYMETRICAL COUPLING WITH LOCK

## RACC 8141



### APPLICATION

General use : Irrigation, network fire, hydrocarbon, common fluids.

### GENERAL CHARACTERISTICS

Aluminium couplings  
White NBR with lock  
Complies to NF-E 29572.

### CONSTRUCTION

Aluminium body.  
NBR gasket.  
Steel snap ring.

### DIMENSIONS


DN		Ø E	Ø C	L1	L2	Weight (kg)
mm	inch					
20	3/4"	30	20	59	12,0	0,05
25	1"	42	24	68	14,5	0,09
32	1"1/4	48	30	68	14,0	0,12
40	1"1/2	56	39	86	17,0	0,21
50	2"	68	49	106	21	0,37
65	2"1/2	84	64	109	22	0,44
80	3"	94	80	103	26	0,76
100	4"	122	97	136	27	1
150	6"	180	150	120	37	2,35

### WORKING CONDITIONS

Maximum working temperature: -10°C / +180°C  
Working pressure : 16 bar.

### STANDARDS

Fabrication according to ISO 9001 : 2008  
Construction according to NF-E 29572  
Threaded connection according to NF EN ISO 228-1.

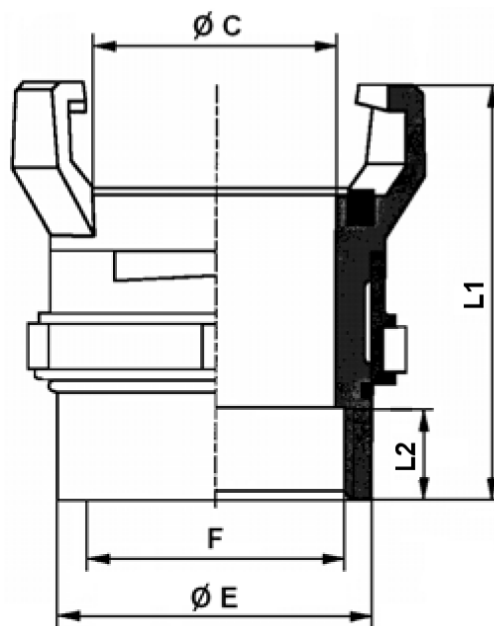

The photographs and technical art works are not contractual. The specifications of the presented products are open to modifications without previous advice