

Ref. : STABPN16

Rev. : Initial

Date : 08/07/2015

Page : 1/1

FLOW STABILIZER STABPN16




Tecofi'
VALVE DESIGNER - FRANCE

APPLICATION

Stabiliser for water meter WOLTMANN with axial or helical spiral.


GENERAL CHARACTERISTICS

Range: from DN200 to DN1000.
Body in high strength carbon steel.
Epoxy recovery protection.
Low head losses.
Flange connection PN16.

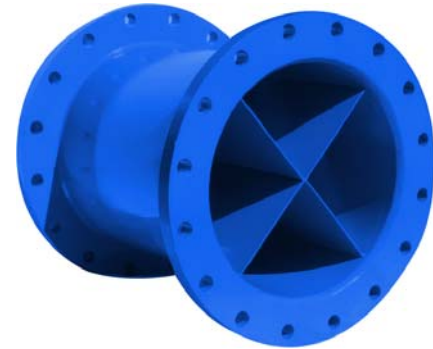

DIMENSIONS

DN		L	ØD	ØK	n	Flow (m3/h)	Weight (kg)
mm	inch						
200	8"	500	340	295	12	900	38
250	10"	500	405	355	12	1100	38
300	12"	550	460	410	12	1250	59
400	16"	550	580	525	16	2100	89
500	20"	620	715	650	20	3200	134
600	24"	800	840	770	20	2300	250
700	28"	800	910	840	24	3800	290
800	32"	800	1025	950	24	-	-
900	36"	800	1115	1050	28	6840	575
1000	40"	-	1255	1170	28	-	-

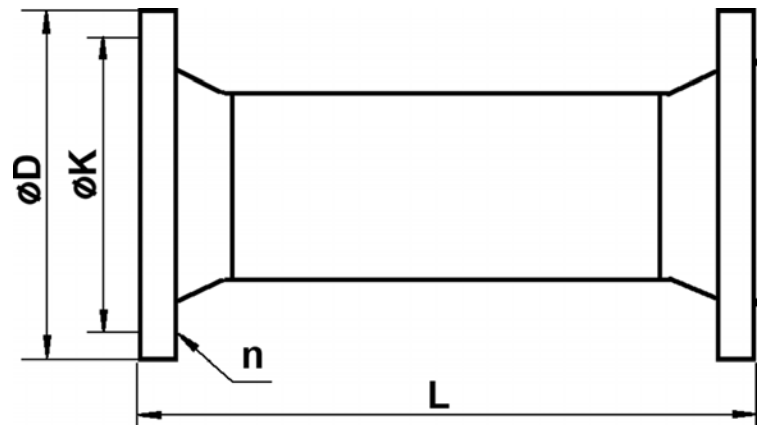

STANDARDS

Flange connection PN 16 , according to standards EN 1092-2, BS450, AISI B16.1-5.