

Ref. : STABPN25

Rev. : Initial

Date : 08/07/2015

Page : 1/1

FLOW STABILIZER STABPN25




Tecofi'
VALVE DESIGNER - FRANCE

APPLICATION

Stabiliser for water meter WOLTMANN with axial or helical spiral.


GENERAL CHARACTERISTICS

Range: from DN50 to DN1000.
Body in high strength carbon steel.
Epoxy recovery protection.
Low head losses.
Flange connection PN25.

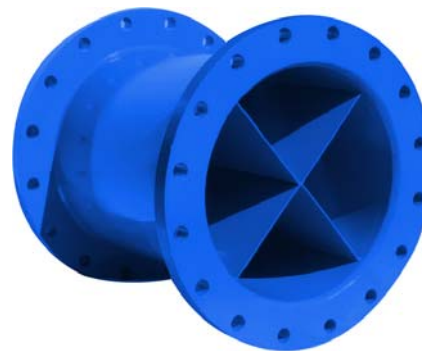

DIMENSIONS

DN		L	ØD	ØK	n	Maximum flow (m3/h)	Weight (kg)
mm	inch						
50	2"	200	165	125	4	30	20
65	2"1/2	200	185	145	8	100	21
80	3"	225	200	160	8	150	23
100	4"	300	235	190	8	250	25
125	5"	300	270	220	8	350	25
150	6"	350	300	250	8	500	30
200	8"	500	360	310	12	900	38
250	10"	500	425	370	12	1100	38
300	12"	550	485	430	16	1250	59
400	16"	550	620	550	16	2100	89
500	20"	620	730	660	20	3200	134
600	8"	800	845	770	20	2300	250
700	10"	800	960	875	24	3800	290
800	12"	800	1085	990	24	-	-
900	16"	800	1185	1090	28	6840	575
1000	20"	-	1320	1210	28	-	-

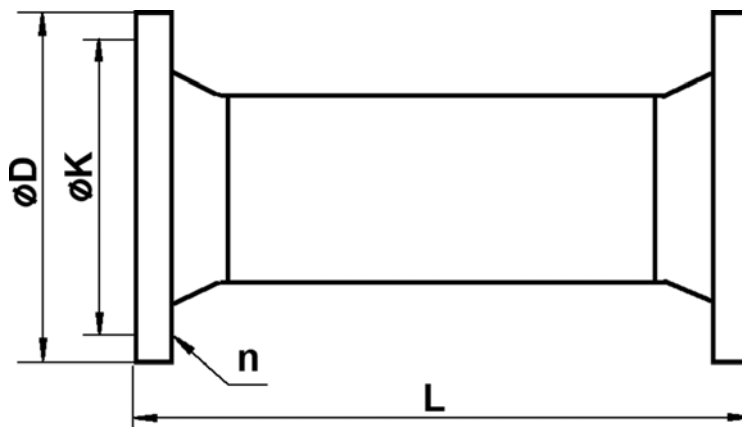

STANDARDS

Flange connection PN 25 , according to standards EN 1092-2, BS450, AISI B16.1-5.