

Ref. : VGA 3430-00

Rev. : Initial

Date : 06/05/2015

Page : 1/1

KNIFE GATE VALVE WITH HANDWHEEL CAST IRON BODY

VGA 3430-00



APPLICATION

General use : Pulp production, water, water treatment, waste water, chemical industry (powdery or crystallizing products), wine-producing, pulverized products (cement work, pneumatic transport, stocking).

GENERAL CHARACTERISTICS

Range : from DN 50 to DN 600.
 Function ON/OFF or regulation.
 Wafer threaded mounting ASA 150.
 Unidirectional tightness, direction indication thanks to the arrow on the body.
 Small retention zone: the gate is guided in the body and has little clearance.
 Gland assembly: packing and O-ring (same materials as seat joint) to assure the elasticity and decrease the operating torque. Small head loss. Possibility to regulate thick fluids with the adaptation of a diaphragm ring.

CONSTRUCTION

17	1	O-Ring	Nitril	
16**	1	Support ring	Stainless steel 316	DIN: X5CrNiMo18 10 ASTM: A 182 AISI 316 BS: 970 316 S16
15**	1	Gasket	Nitril	
14	1	Packing gland	Aluminium (DN 50-450) Steel (DN 500-600)	
13	1	Handwheel	Cast iron EN-GJL-250	DIN: GG25 ASTM: A48 class 40B BS: 1452 Grade 250
12	1	Protection tube	Steel	
11	1	Cap	Plastic	
10	1	Greaser	Stainless steel	
9	1	Stop screw	Stainless steel	
8	1	Nut	Bronze	
7	1	Friction washer	Bronze	
6	1	Nut support	Zinc steel	
5*	2	Support plate	Steel + epoxy	
4	1	Stem	Stainless steel 13%Cr	
3	1	Gate	Stainless steel X5CrNi 18-10	DIN: X5CrNi18 10 ASTM: A 182 AISI 304 BS: 1449-2 304 S15
2	2	Packing	PTFE	
1	1	Body	Cast iron EN-GJL-250	DIN: GG25 ASTM: A48 class 40B BS: 1452 Grade 250
Pos.	Qty.	Description	Material	

* Pre-shaped parts up to DN 300.
 **Missing parts on metal / metal tightness.

DIMENSIONS

DN		A	B	C	D	Ø V	H	Ø K (Inch)	n	Ø M	Weight (kg)
mm	inch										
50	2"	40	283	124	83	200	348	4.75	4	4 - 0.75	8
65	2 1/2"	40	308	139	83	200	388	5.50	4	4 - 0.75	10
80	3"	50	333	154	83	200	413	6.00	4	4 - 0.75	11
100	4"	50	378	174	83	200	488	7.50	8	4 - 0.75	12
125	5"	50	423	189	93	250	564	8.50	8	4 - 0.88	17
150	6"	60	474	220	93	250	635	9.50	8	4 - 0.88	21
200	8"	60	593	275	108	310	809	11.75	8	4 - 0.88	38
250	10"	70	685	326	108	310	946	14.25	12	8 - 1.00	52
300	12"	70	792	380	108	310	1118	17.00	12	8 - 1.00	63
350	14"	96	900	438	290	500	1282	18.75	12	10 - 1.12	115
400	16"	100	978	494	290	500	1441	21.25	16	10 - 1.12	145
450	18"	106	1105	547	290	500	1587	22.75	16	14 - 1.25	186
500	20"	110	1215	613	290	500	1809	25.00	20	14 - 1.25	221
600	24"	110	1418	716	290	500	2060	29.50	20	14 - 1.38	265


WORKING CONDITIONS

Maximum working pressure :
 DN 50-250 : 10 bar.
 DN 300-450 : 7 bar.
 DN 500-600 : 4 bar.

Maximum temperature : -10°C / + 80°C (Standard tightness)

Others materials on request (If marked)	Maximum temperature	
Metal / metal	T max : -10°C / +80°C.	<input type="checkbox"/>
White NBR	T max : -10°C / +80°C.	<input type="checkbox"/>
EPDM	T max : -10°C / +130°C.	<input type="checkbox"/>
Silicone	T max : -10°C / +170°C.	<input type="checkbox"/>
FPM (Type Viton®)	T max : -10°C / +170°C.	<input type="checkbox"/>
PTFE***	T max : +4°C / +170°C.	<input type="checkbox"/>
CSM (Type Hypalon®)	T max : +4°C / +80°C.	<input type="checkbox"/>

*** Minimum working pressure : 1 bar

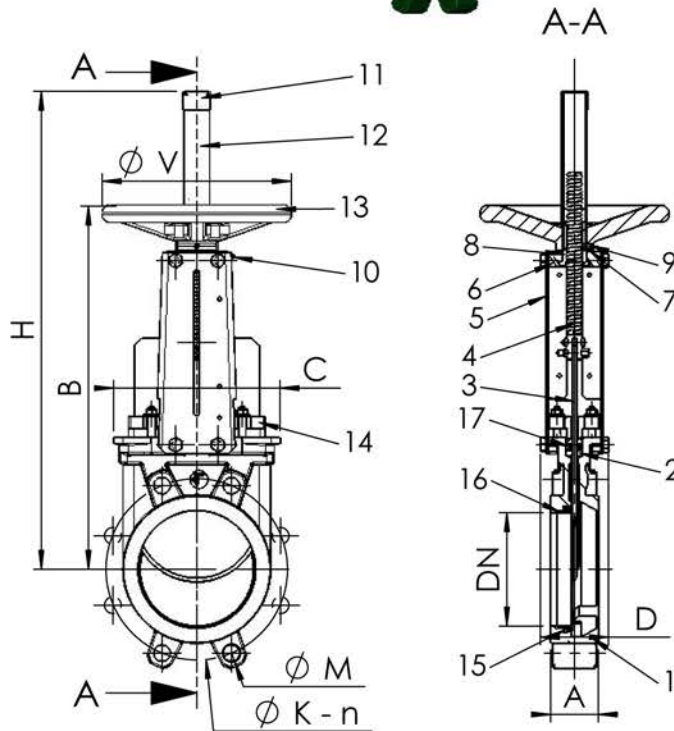

Standard tightness



Tightness metal/metal

STANDARDS

Manufacture according to the requirements of the European directive 2014/68/EU «Equipments under pressure» : modulate H.
 On request : Product in accordance to european directive "Potentially explosive atmospheres" N° 94/9/EC :
 ATEX II 2 GD c and ATEX II 3 GD c.
 Test procedures are established according to standards EN 12266-1, DIN 3230, BS 5154 and ISO 5208.
 Connections between flanges according to standard ASME B16.5 Class ASA150

TECOFI France - 83, Rue Marcel Mérieux 69960 Corbas - FRANCE
 Tél. +33 (0) 4 72 79 05 79 - Fax +33 (0) 4 78 90 19 19 / +33 (0) 4 72 79 05 70
 Adresses e-mail : sales@tecofi.fr ; tecofi@tecofi.fr / Site web : www.tecofi.fr

The photographs and technical art works are not contractual. The specifications of the presented products are open to modifications without previous advice.